REV.	DESCRIPTION	DATE
A	RELEASE	Apr. 23, 2002
B		
C		

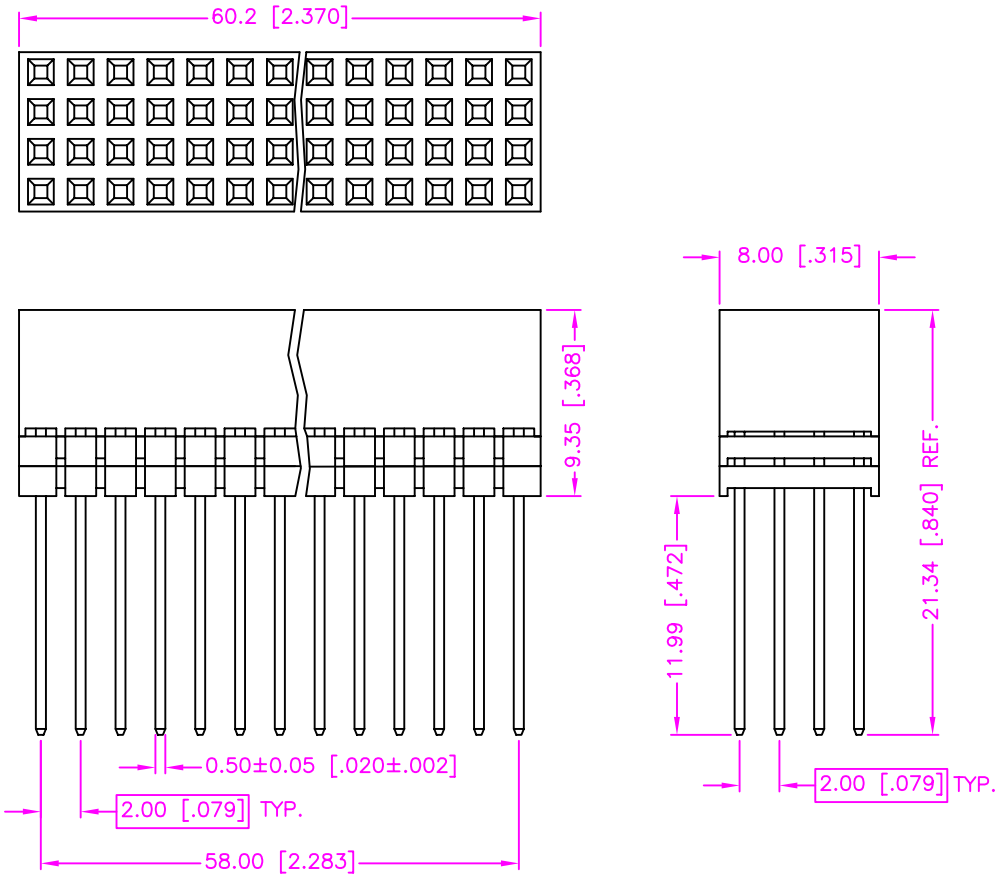

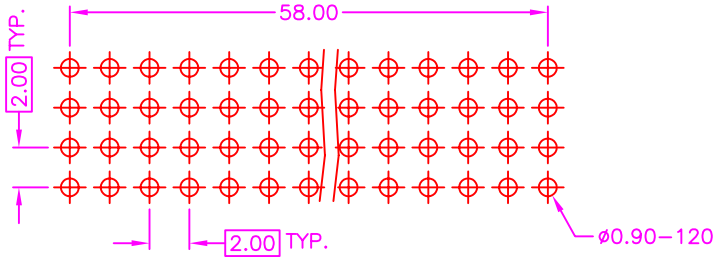

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : NYLON 6T (UL 94V–0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : –55°C TO +105°C.

ORDER INFORMATION :

25 – 22 03 – 4 30 – ✱ G – R

- SERIES CODE
- TYPE 03
- QUAD ROWS
- NUMBER OF POSITION PER ROW
- CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
- GOLD PLATING ON SOLDER TAIL
- ENVIRONMENTAL PROTECTION CODE (RoHS)

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER AMY CHECK JUDY APP'D ERIC	Astron WWW.ASTRON.COM.TW	
UNITS : mm [inch]	PRODUCT SPEC. — 315–0008 C342–2004	NAME POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATED TYPE DRAW NO. C25–2203–430–XG–R	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. A	(A)	