
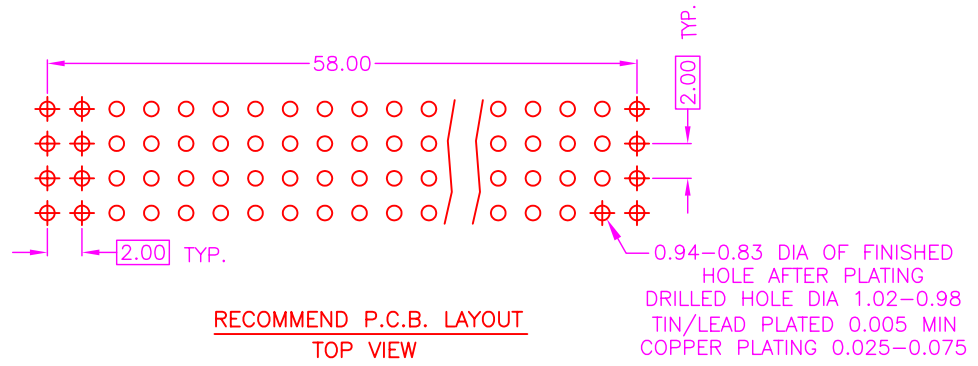
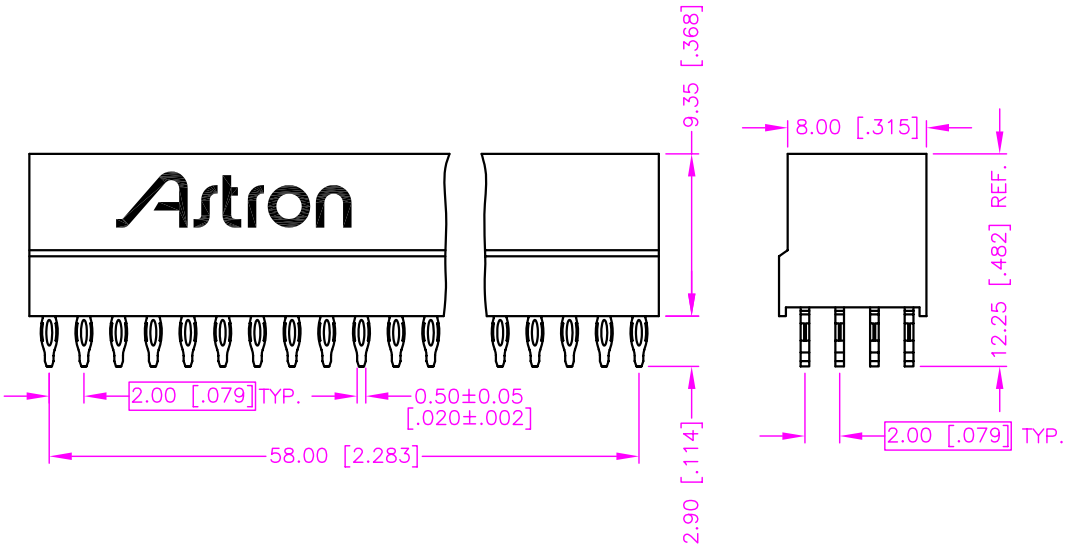


REV.	DESCRIPTION	DATE
A	RELEASE	Dec. 16, 2002
B	RoHS MODIFY	Feb. 03, 2005

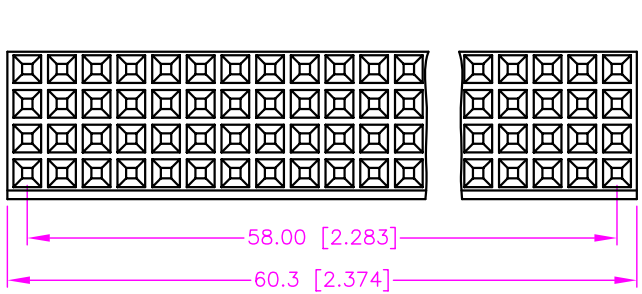


MATERIALS

1. HOUSING : P.P.S. (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)
3. STRIP : P.P.S., BLACK.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 50V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION :

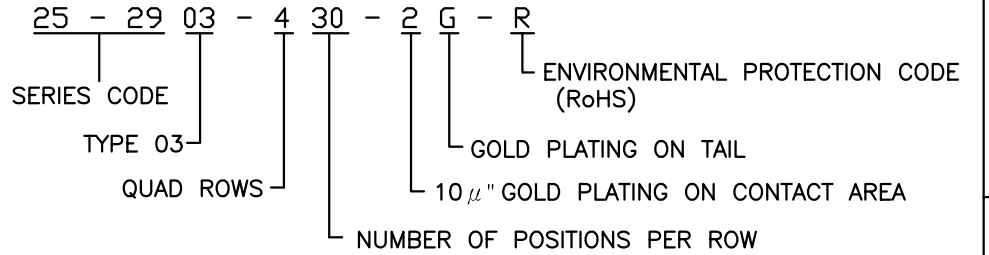

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>ANY</i> CHECK <i>SUE</i> APP'D <i>ERP</i>	 WWW.ASTRON.COM.TW NAME POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT PRESS FIT TYPE
UNITS : mm [inch]	PRODUCT SPEC. C349-2002	DRAW NO. C25-2903-430-2G-R	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B
			10018