

Pitch: 3.81mm(0.150inch)




SPECIFICATIONS


		CUL		VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	
負載電流	Rated Current	Bemessungsstrom	10A	
電線線徑	Wire Size	Leitergrößen	26~16AWG	
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
押線圈	Cage Clamp	Klemmkörper	Brass, Ni plated	
端子	Terminal	Stiftmaterial	Brass, Tin plated	
螺絲	Screw Size	Schraubengewinde	M2.0, steel, Ni plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
扭力	Torque	Anzugsmoment	1.5 lb-inch	
PCB板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 1.3mm	
UL File No.	E167040			

TABLE

Item No.	A(mm)	A(inch)
MB362-381A04	9.5	0.375
MB362-381A06	13.3	0.525
MB362-381A08	17.2	0.675
MB362-381A10	21.0	0.825
MB362-381A12	24.8	0.975
MB362-381A14	28.6	1.125
MB362-381A16	32.4	1.275
MB362-381A18	36.2	1.425
MB362-381A20	40.0	1.575
MB362-381A22	43.8	1.725
MB362-381A24	47.6	1.875
MB362-381A26	51.4	2.025
MB362-381A28	55.3	2.175
MB362-381A30	59.1	2.325
MB362-381A32	62.9	2.475

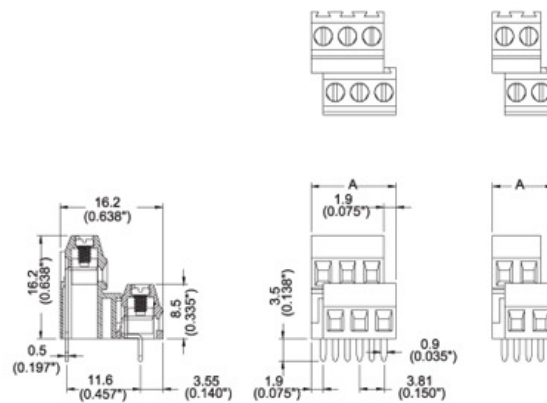

PCB Layout



Note:
Screw Plating: Changes are available upon request